


BEARING ISOLATOR REQUEST FOR QUOTE

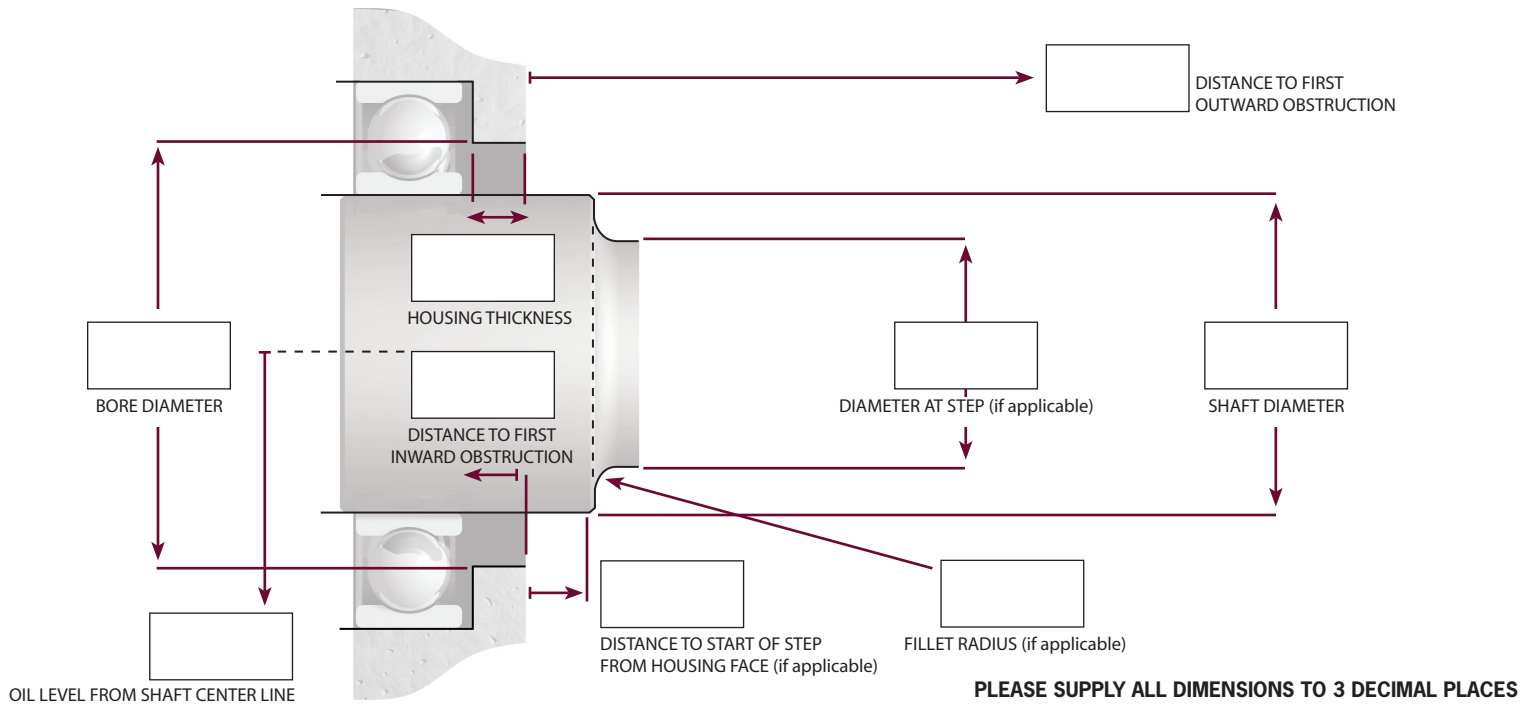

Data Needed For Quote

APPLICATION: Pump Motor Other _____

CURRENT SEALING SOLUTION: Lip Laby Other _____

SHAFT POSITION: Horizontal Vertical Up Vertical Down

BEARING TYPE: Ball Sleeve Roller

MOUNTING: Standard Press-Fit Flange Other _____

PRIMARY FOCUS: Contamination Lube Retention Both

LUBE: Oil (level) _____ Grease Oil Mist Forced Oil System

FIRST OBSTRUCTION: Step Keyway Other _____

AXIAL MOVEMENT: _____

SHAFT SPEED: _____

MISALIGNMENT:

Diametric Run Out Greater Than .005" TIR? Yes No
If yes, how much? _____

Shaft To Bore Misalignment Greater Than .007" TIR? Yes No
If yes, how much? _____

TEMPERATURE AT SEAL: °C | °F Min _____ Max _____

ENVIRONMENT: _____

HOUSING TYPE: Solid Split

SEAL TYPE: Solid Split

CONSTRUCTION MATERIAL: Bronze Stainless Other _____

TOTAL PIECES OF EQUIPMENT: _____

CONTACT FOR QUESTIONS: _____

BRIEFLY DESCRIBE THE APPLICATION

Fax RFQ sheet to 309-787-6114 or email info@inpro-seal.com



INPRO/SEAL[®]
A Waukesha Bearings Business

EXPERT ENGINEERING. PROVEN RESULTS.