



APPLICATION SOLUTIONS: **mini66™ BEARING ISOLATOR**

IP-66 PERFORMANCE FROM A BEARING ISOLATOR THIS SMALL?



ONLY FROM INPRO/SEAL.

Permanent bearing protection now comes in small packages.

Introducing the Inpro/Seal® mini66 Bearing Isolator. The mini66 is rated IP66, permanently protecting against both dust and water ingress. With a 0.375" [9,52mm] overall length, the mini66 is the smallest IP66 rated Bearing Isolator available.

It's unique design exceeds IEEE-841 standards and is a perfect fit for washdown environments. Manufactured in bronze and stainless steel, the mini66 is custom engineered to meet your specifications.

Count on us to improve reliability, increase MTBR, and maximize asset protection and utilization. As the inventor and global leader of Bearing Isolator technology, Inpro/Seal has the knowledge and local sales network to deliver expert engineering and proven results. Same day shipments available.


FACTS AT A GLANCE

The Inpro/Seal® mini66™ Bearing Isolator:

- provides permanent bearing protection to applications with limited space.
- is IP66 rated, protecting against both dust and water ingress.
- has a 0.375" [9,52mm] overall length, making it the smallest IP66 rated Bearing Isolator on the market.
- can be manufactured in bronze and stainless steel.
- is custom engineered to meet the exact specifications of your application.
- can be shipped the same day an order is placed.



mini66™ REQUEST FOR QUOTE

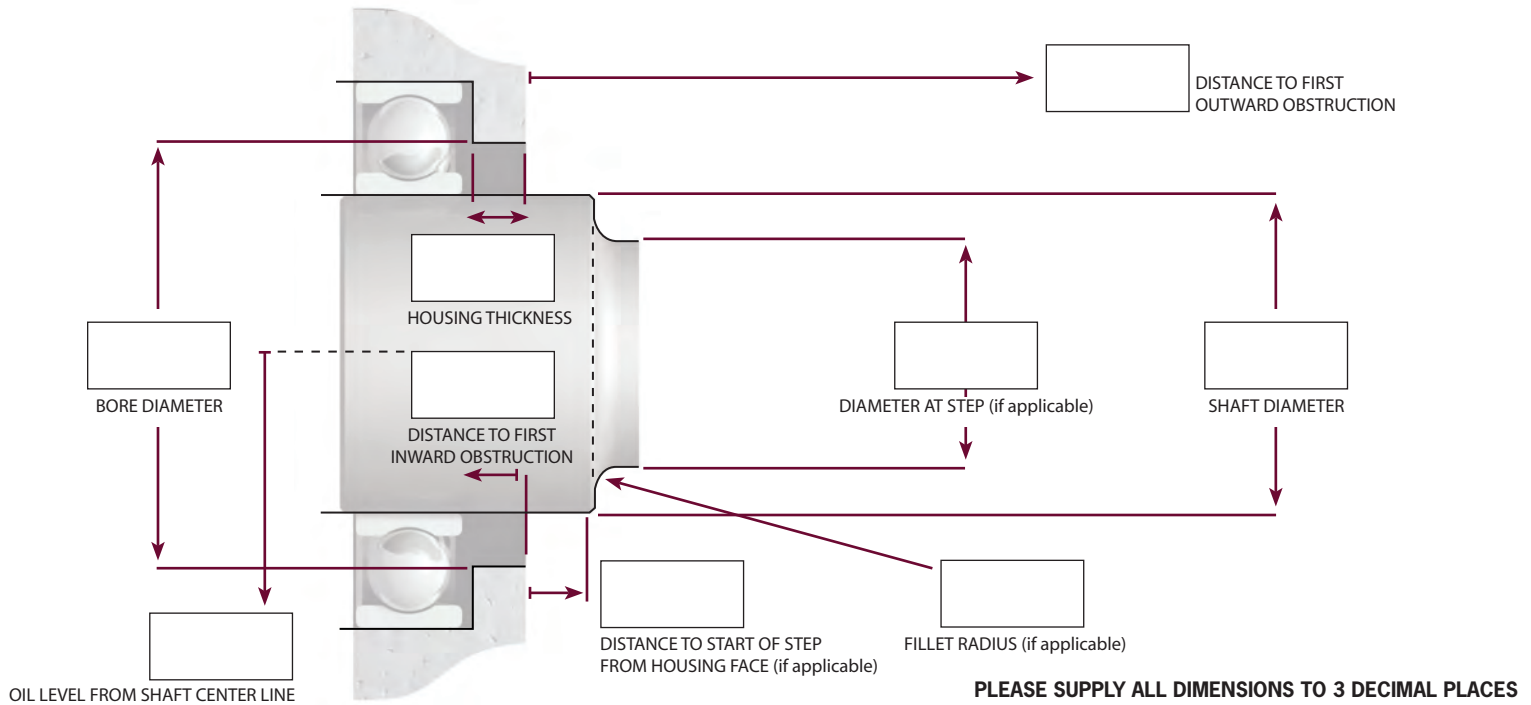

Data Needed For Quote

APPLICATION: Pump Motor Other _____

CURRENT SEALING SOLUTION: Lip Laby Other _____

SHAFT POSITION: Horizontal Vertical Up Vertical Down

BEARING TYPE: Ball Sleeve Roller

MOUNTING: Standard Press-Fit Flange Other _____

PRIMARY FOCUS: Contamination Lube Retention Both

LUBE: Oil (level) _____ Grease Oil Mist Forced Oil System

FIRST OBSTRUCTION: Step Keyway Other _____

AXIAL MOVEMENT: _____

SHAFT SPEED: _____

MISALIGNMENT:

Diametric Run Out Greater Than .005" TIR? Yes No
If yes, how much? _____

Shaft To Bore Misalignment Greater Than .007" TIR? Yes No
If yes, how much? _____

TEMPERATURE AT SEAL: °C | °F Min _____ Max _____

ENVIRONMENT: _____

HOUSING TYPE: Solid Split

DESIRED IP RATING: _____

CONSTRUCTION MATERIAL: Bronze Stainless Other _____

TOTAL PIECES OF EQUIPMENT: _____

CONTACT FOR QUESTIONS: _____

BRIEFLY DESCRIBE THE APPLICATION

Fax RFQ sheet to 309-787-6114 or email info@inpro-seal.com